
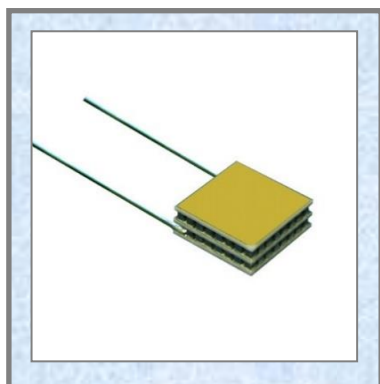


THERMO MODULE DATA



Model K2M-030
RoHS (EU) 2015/863 Compliant


Th	$\Delta T_{max}(^{\circ}C)$	$I_{max}(A)$	$V_{max}(V)$	$Q_{cmax}(W)$
27°C	92	2.6	4.1	3.6
70°C	115	2.6	5.1	4.0

	W1	L1	W2	L2	H
Size(mm)	8.05	8.05	8.05	8.05	3.0
Tolerance(mm)	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2
Metallization	Cu-Ni-Au				
Ceramic material	Alumina				
Assembly solder	SnSb (melting point : 232°C)				

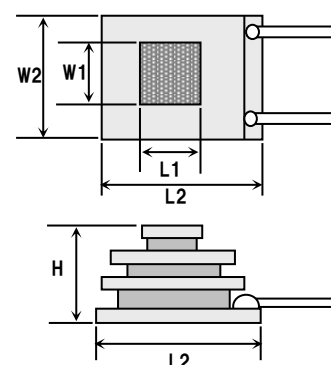

Performance Diagram

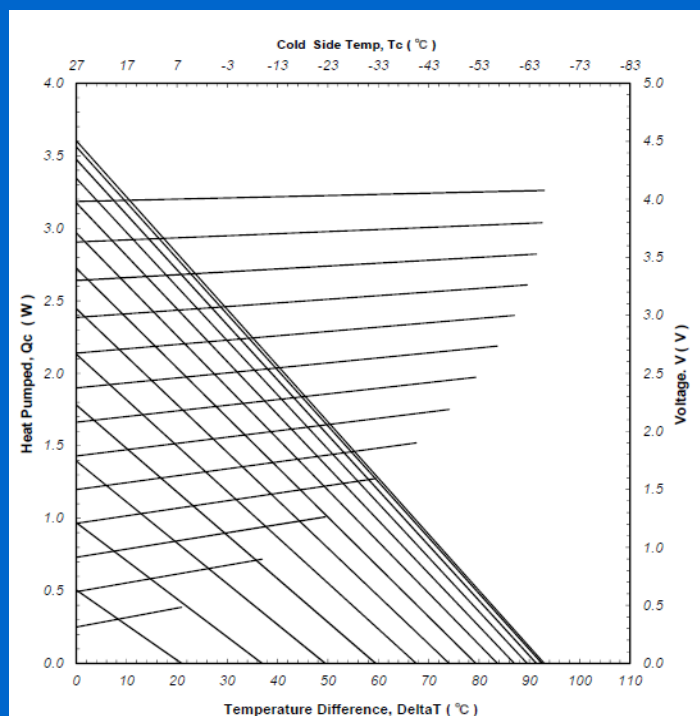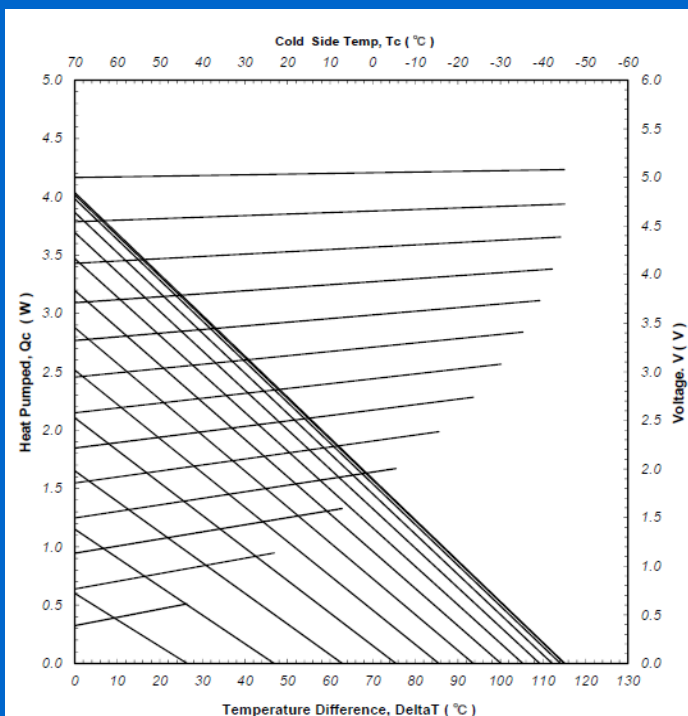Th=27°C

Th=70°C

Ambient

Vacuum

Current value
 $I = 0.2 \sim 2.6A$ (Step = 0.2 A)

KELK Ltd.
Head Office & Factory
Inquiry
www.kelk.co.jp

3-25-1, Shinomiya, Hiratsuka-shi, Kanagawa-ken, 254-8543, Japan

Phone: +81-463-22-8724 Fax: +81-463-22-3692

<https://www.kelk.co.jp/english/contact/>

Phone: +81-463-23-3697 Fax: +81-463-24-6749