



THERMO MODULE DATA

Model **K3M-002** (RoHS (EU) 2015/863 Compliant)

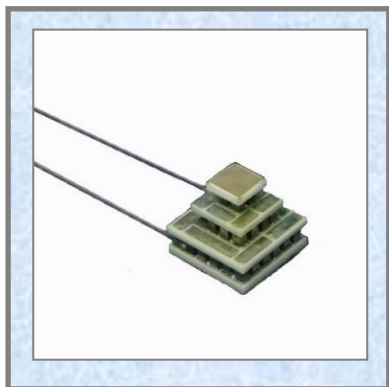

Th	$\Delta T_{max}(^{\circ}C)$	I _{max} (A)	V _{max} (v)	Q _{cmax} (w)
27°C	121	1.6	2.1	0.4
70°C	150	1.6	2.6	0.5



	W1	L1	W2	L2	H
Size(mm)	3.0	3.0	6.0	6.0	4.3
Tolerance(mm)	±0.1	±0.1	±0.2	±0.2	±0.3
Metallization	Cu-Ni-Au				
Ceramic material	Alumina				
Assembly solder	SnSb (melting point:232°C)				

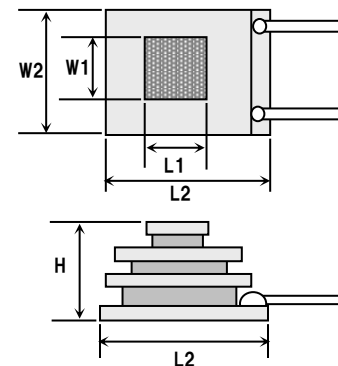

Performance Diagram

Th=27°C

Th=70°C

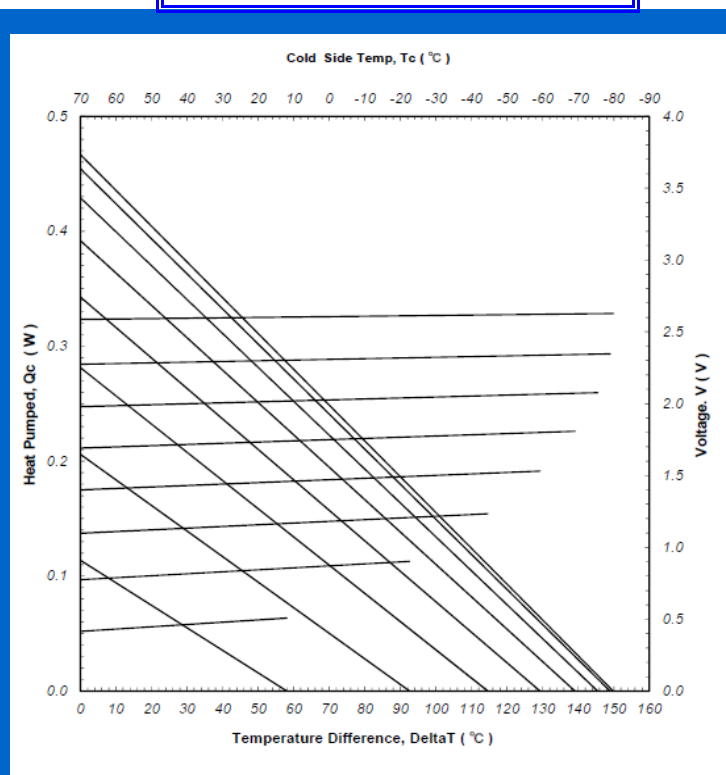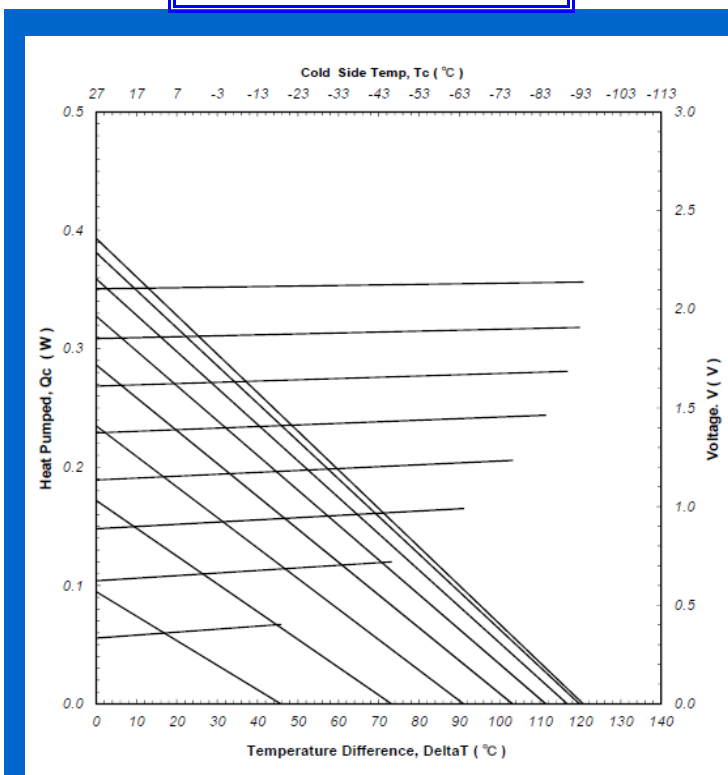

Ambient	Vacuum
Current value	I = 0.2 ~ 1.6A (Step = 0.2 A)

KELK Ltd.

■ Head Office & Factory

■ Inquiry

<https://www.kelk.co.jp>

3-25-1, Shinomiya, Hiratsuka-shi, Kanagawa-ken, 254-8543, Japan

Phone: +81-463-22-8724 Fax: +81-463-22-3692

<https://www.kelk.co.jp/contact/>

Phone: +81-463-23-3697 Fax: +81-463-24-6749